


To comply with the law, the feed for the Rear Fog Lamp Switch is taken from the Dip Beam circuit, so that the Rear Fog Lamp can only be switched on when Headlamps are on Dip Beam.

If there is no Warning Light built into the switch that you are using you will need to put a Warning Light on the dash.

This is wired from the UY side of the switch with the body of the bulbholder going to earth.

Ensure you have a good earth when fitting the Rear Fog Lamps.

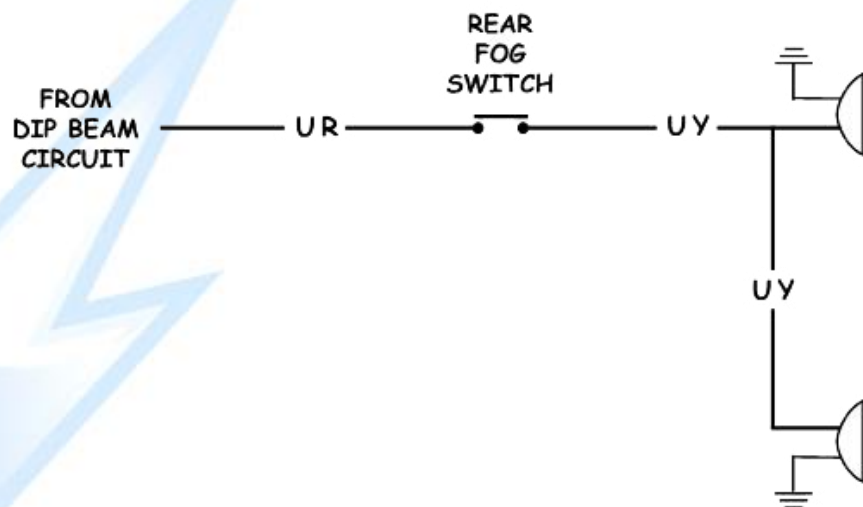

**Standard Cable Colour Abbreviations Used as follows:**

B = Black	N = Brown	R = Red	W = White
G = Green	O = Orange	S = Slate	Y = Yellow
K = Pink	P = Purple	U = Blue	LG = Lt Green

## WIRING FOR REAR FOG LAMPS

